PROPOSED PLAYGROUND IMPROVEMENTS/LAYOUT

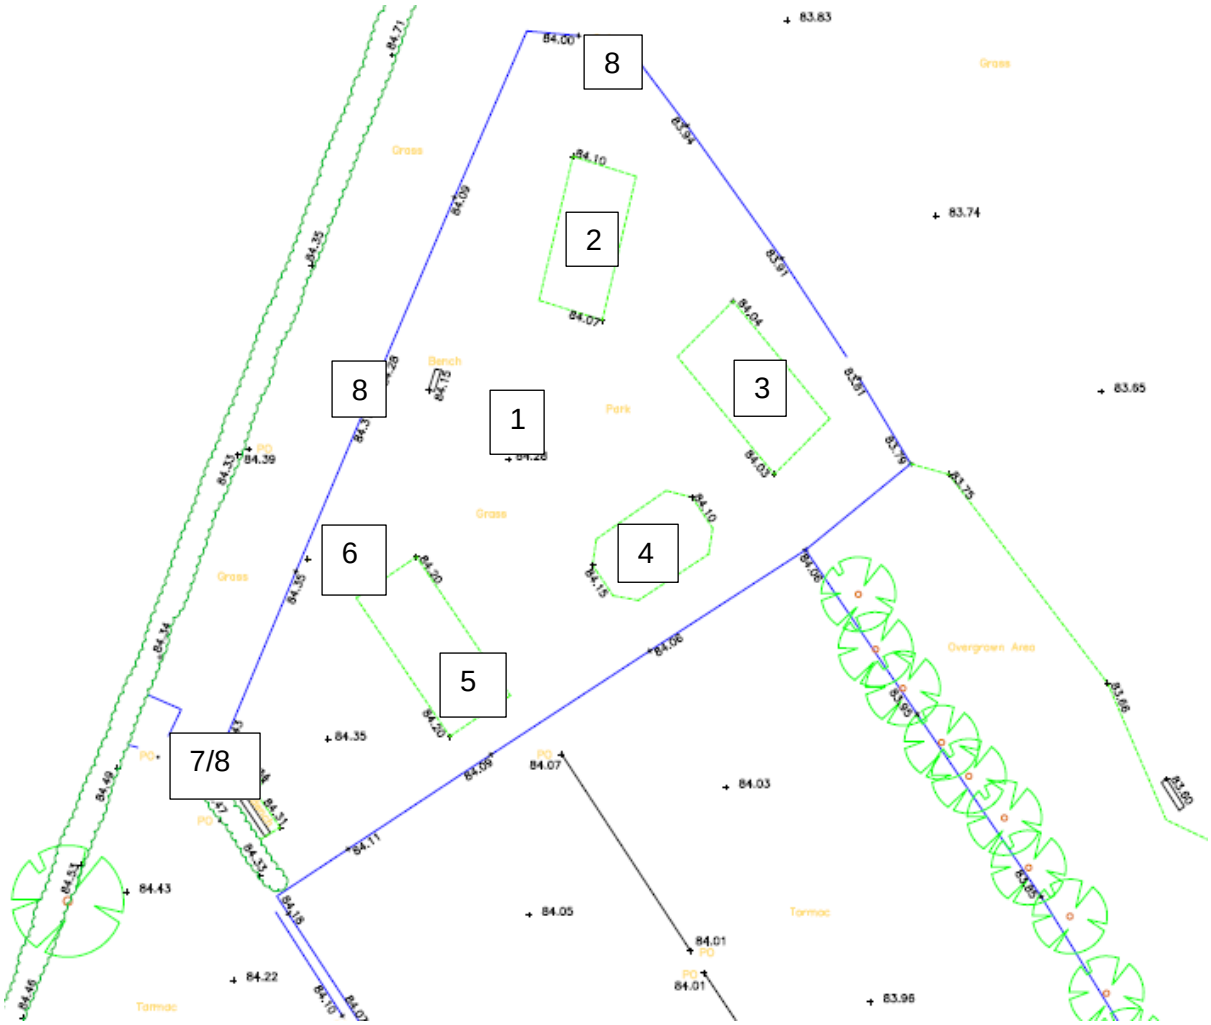

Schedule of Playground Improvements

1. *Sensory Play Equipment:* remove existing concrete and existing fire engine and install sensory play equipment and mulch safety surface, with new bench and bin adjacent on the eastern side.
2. *Existing Slide:* replace existing tree bark with mulch safety surface.
3. *Existing Climbing Frame:* replace existing tree bark with mulch safety surface.
4. *Existing Rocker Horse:* replace existing wet pour with mulch safety surface.
5. *Swings:* replace existing swings with new swings, turn at right angle to be parallel with tennis court boundary, install mulch safety surface.
6. *New Equipment:* Install new balance/spinning equipment with mulch safety surface.
7. *Entrance Gates:* Relocate vehicular access to North Western Side and pedestrian access to western corner of play area to provide pedestrian access from car park to playground and bridle way. Remove existing hedgerow and replace with bow top fencing. Remove/replace existing bench. Consider relocating fire engine to western end of play area.
8. *Playground Gates & Fencing:* Paint Bow Top Fencing and paint access gates and in bright colour.